

3 Phase Flexible AC Current Probe Model ACP 3003_18

P/N: P-02.732.4 ACP 3003_18/24

The ACP 3003_18 is a 3 Phase AC current Probe utilizing the Rogowski principle. It can be used to measure currents up to 3000 from very low frequencies to 20kHz. The flexible and lightweight measuring head allows quick and easy installation in hard to reach areas with large conductors.



Electrical Characteristics

Current Ranges (selectable via rotary switch)	30A / 300A / 3000A AC _{RMS}
Output Sensitivity (AC coupled)	100mV / 10mV / 1mV per A
Accuracy (45 - 65Hz)	± 1% of reading ± 0.1A (30A range)
.....	± 1% of reading ± 1A (300A / 3000A range)
Load Impedance.....	100kΩ minimum
Linearity (10% to 100% of range)	± 0.2% of reading
Noise	80mA (30A) / 400mA (300A / 3000A range)
Bandwidth (-1dB).....	10Hz to 20kHz
Phase Error (45 – 65Hz)	± <1°
Temperature Coefficient.....	± 0.1% of reading / °C
Position Sensitivity	± 2% of reading
External Field (with cable > 100mm from the head) .	± 0.25% of range
Power Supply	2 x AA MN 1500 LR6 Alkaline
.....	1000 hours, low battery indicator
.....	External power supply (3V / 100mA)
Overload Indication.	Red LED ON indicates the range overload
Working Voltage (see Safety Standards section)	1000V AC _{RMS} or DC (Probe and Integrator)
.....	30V max (Output)

General Characteristics

Probe Material	Alcryn 2070 NC LATENE 7H2W V0
Probe Cable Length.....	610mm (24")
Probe Cable Diameter.....	9.9mm (nominal)
Cable Length (Probe to Integrator box)	2m
Output.....	0.5m long cable terminated with
.....	3 x safety male BNC
Operating Temperature Range	-20 to +65°C
Storage Temperature Range	-40 to +75°C
Operating Humidity.....	15% to 85% (non condensing)
Degree of protection.....	IP65 Probe, IP4x Integrator module
Color.....	L1 - Black, L2 - Red, L3 - Blue

ROHS and WEEE Compliant

AUTHORIZED DISTRIBUTOR



POWERetc Corporation
Santa Clara, CA 95054
(408) 540-3199

www.poweretc.com
info@poweretc.com

Exclusive GMC-I PROSyS Distributor of Americas

Safety Standards

EN 61010-1
EN 61010-2-032


1000 V_{RMS}, Category III, 600 V_{RMS}, Category IV, Pollution Degree 2 (Probe and Integrator)

Use of the probe on uninsulated conductors is limited to 1000 V AC_{RMS} or DC and frequencies below 1 kHz.

EMC Standard

EN 61326-2-2

Dimensions (in mm)

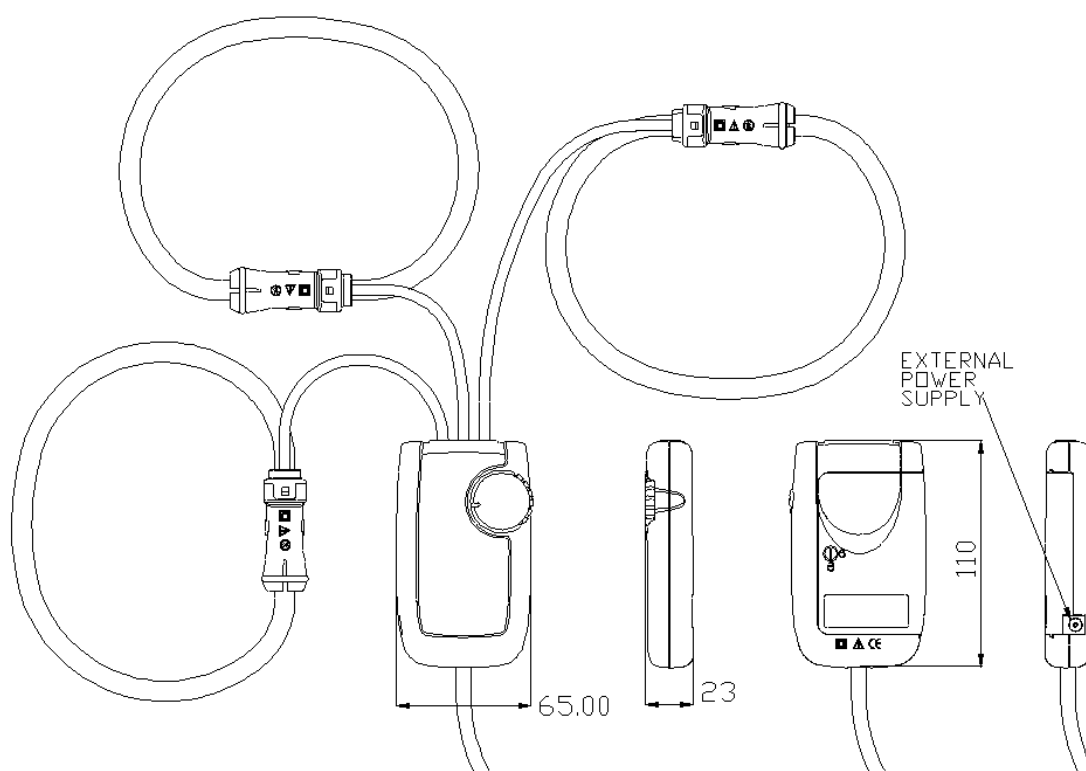

AUTHORIZED DISTRIBUTOR

I²R etc

POWERetc Corporation
Santa Clara, CA 95054
(408) 540-3199

www.poweretc.com
info@poweretc.com

Exclusive GMC-I PROSys Distributor of Americas